

Product Data Sheet

Article number (will be added by Beslag Design):

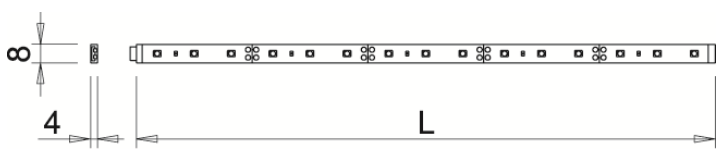

973202 / 973203 / 973204

Produced by KG	Date 2020-01-28	Replaces 2017-01-23	Valid from 2020-01-28
-------------------	--------------------	------------------------	--------------------------

Company information

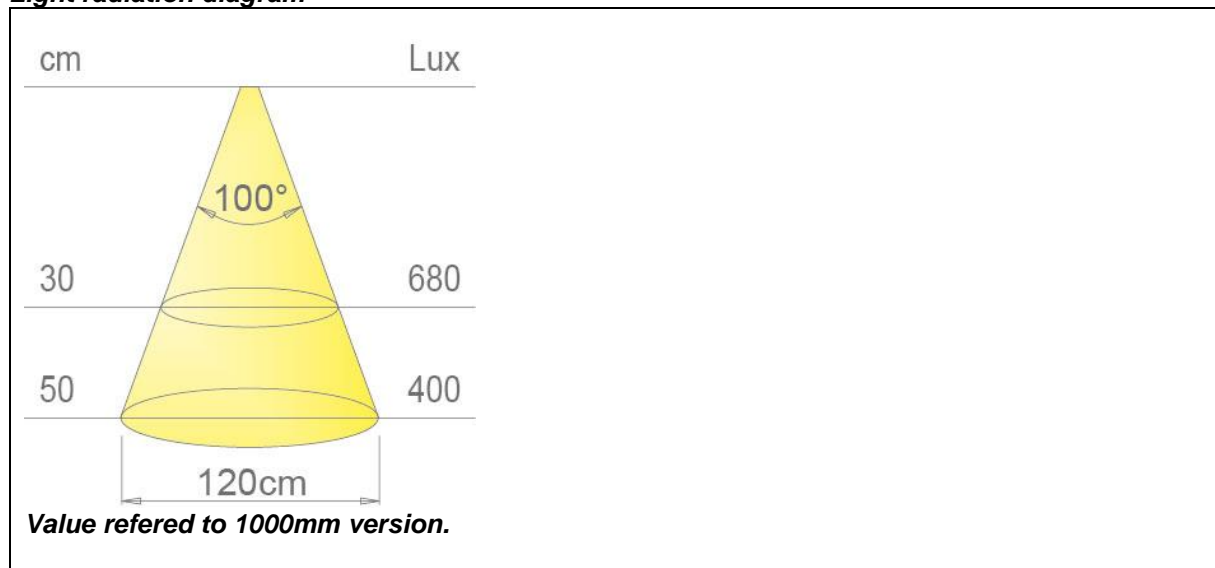
Company name	Beslag Design	Telephone number	+46(0)431 784 80
Address	Inre Kustvägen 32 SE-269 43 Båstad	Fax number	+46(0)431 784 99
E-mail	info@beslagdesign.se	Web page	www.beslagdesign.se

Product Data

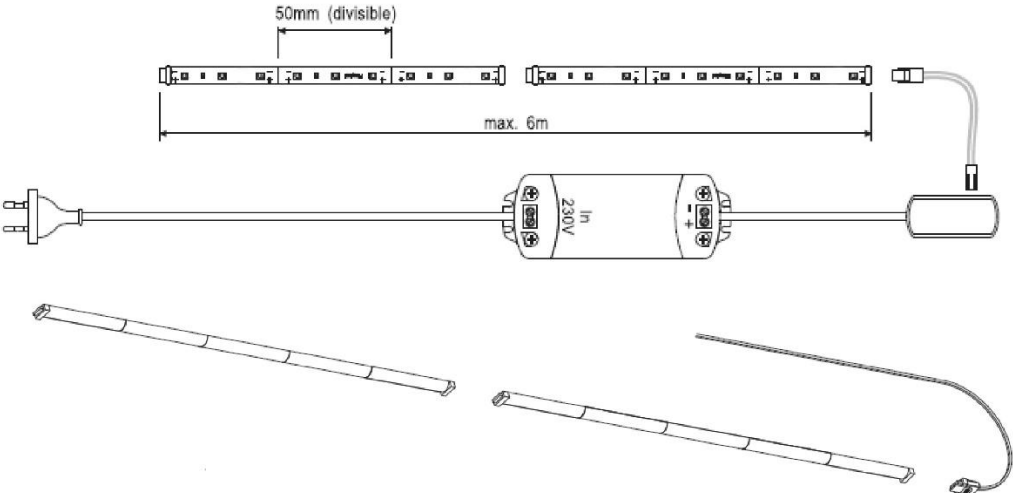
Product name	FlexyLED CR HE IP44
Article No.	973202 (500mm) / 973203 (1000mm) / 973204 (2000mm)
Versions	N/A
Description	LED-strip (continuous rows connection)
Cutting distance	Divisible every 50mm
Product material	copper /highly transparent resin
Surface finish	White
Dimensions (mm)	
Light source type	SMD LED module (60diodes/m, 9,6W/m)
Connection type	CR
Voltage (V)	24V
Rated power (W)	4,8W (973202) / 9,6W (973203) / 19,2W (973204)
Luminous power at 50cm (lux)	400lux
Luminous flux (lm)	408lm (973202) / 816lm (973203) / 1632lm (973204)
Luminous efficiency (lm/W)	85lm/W
Light temperature (K)	3400K
Color rendering index (CRI)	Ra ≥ 80
Beam Angle (°)	100°
Dimmable (Yes/No)	Yes
Driver included (Yes/No)	No
Life span (h)	30.000h - average value (minimum guaranteed complies with the requirements of EU Regulation 1194/2012)
Replaceable light source	No
Insulation degree	III
IP rating	IP44
Compliance-Standards	EN60598-2-1:1997 EN60598-1:2015 EN62493:2015 EN50581:2012
Compliance-European Directives	2014/35/EU Low Voltage 2009/125/EC Erp (Reg.No1194/2012/UE + Reg. 1428/2015/UE) 2011/65/UE RoHs
Markings	
Total weight (kg)	N/A
Packaging size (WxDxH)	N/A

Other:	
--------	--

Light radiation diagram



<p>Energy label</p>	<p>FLEXYLED DOMUS Line*</p> <p>Denna ljusarmatur har inbyggda lysdiodlampor.</p> <p>A++ A+ A B C D E</p> <p>LED</p> <p>Lamporna i ljusarmaturen kan inte bytas ut.</p> <p>874/2012</p>
<p>Care instructions</p>	<p>N/A</p>
<p>Packaging material</p>	<p>N/A</p>
<p>Recycling instructions</p>	<p>Device is subject to the European Community directives 2002/96/CE and 2003/108/CE and shall be handed in at a waste deposit center</p>

Mounting instructions	<p data-bbox="363 210 1126 241">Fastened with 3M self-adhesive tape (included with the product)</p>  <p>The diagram shows a lighting fixture with a central cylindrical component labeled 'In 230V'. Above it, a strip of self-adhesive tape is shown with a '50mm (divisible)' spacing between segments and a total length of 'max. 6m'. Below the main fixture, two additional components are shown: a long, thin, segmented strip and a shorter, curved strip with a cable end.</p>
-----------------------	--